

POWER SAVING



green ethernet

8-PORT GIGABIT SWITCH

Innovative eco-friendly concept

Reduced power consumption, less heat dissipation

Ideal for VoIP and gaming with intelligent data streaming



THINK GREEN

D-Link takes the lead in networking industry to release Green Ethernet technology with its new series of SOHO Gigabit switches. These environmentally-friendly devices decrease energy costs through the reduction of power consumption without sacrificing operational performance or functionality, providing benefits to both the ecosystem and Home/SOHO users. They are designed to help conserve energy, protect our environment from harmful substances, and reduce waste by using recyclable packaging.

CONSERVING ENERGY

- + Automatically powers down ports that have no link
- + Budgets power output for different Ethernet cable lengths
- + Complies with California's stringent CEC and Australia MEPS regulation requiring the use of more energy efficient power adapters.*

PROTECTING THE ENVIRONMENT

- + Complies with RoHS directive that restricts the use of certain hazardous materials.
- + Complies with WEEE (Waste Electrical and Electronic Equipment) directives that use recyclable packaging to help reduce waste that goes into the environment.

* For USA, Australia & Japan shipment only

WIRED

GIGABIT

GIGABIT CONNECTION FOR HOME AND SOHO

Offers an economical way for the SOHO and small and medium business (SMB) to benefit from the increased bandwidth of Gigabit Ethernet. It provides 8 Gigabit ports for fast server deployment to meet increasing network load.

IEEE 802.1p QoS

- + Ensure time-sensitive data gets delivered efficiently, even during bursts of high data traffic
- + Ensures the optimal experience for gamers and others requiring separation of priority traffic.


CABLE DIAGNOSTIC FUNCTION

With the continuing drive to Home/SOHO Gigabit adaptation, the D-Link Cable Diagnostic Function enables users to efficiently detect the cable condition, simply through seeing LED displayed on the front-panel.

- + Determine whether RJ-45 cables are Gigabit capable while migrating from existing networks using 4-wire CAT 3/5 RJ-45 cable to Gigabit-capable ones, minimizing the service calls or pain might have during the migration.

- + Show the result of detecting RJ-45 cable with an open circuit (a lack of continuity between the pins at each end of the Ethernet cable or a disconnected cable) or short circuit (two or more conductors short-circuited)

YOUR NETWORK SETUP

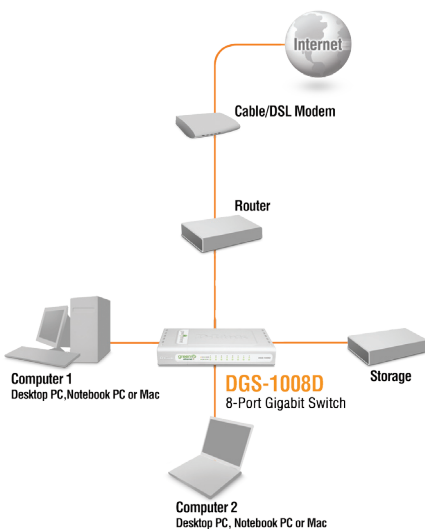

KEY FEATURES

- + Innovative Green Ethernet Technology
- + Inexpensive Gigabit solution for SOHO & SMB
- + 8 10/100/1000Mbps Gigabit ports on Cat. 5 cable
- + 16Gbps switching fabric
- + Auto MDI/MDIX cross over for all ports
- + Secure store-and-forward switching scheme
- + Full/half-duplex for Ethernet/Fast Ethernet speeds
- + Blazing 2000Mbps full duplex for Gigabit speed
- + IEEE 802.3x Flow Control
- + Supports 9,600Bytes Jumbo Frames
- + Supports IEEE802.1p QoS (4 Queues, Strict Mode)
- + Supports Cable Diagnostic Function
- + RoHS compliant
- + Plug-and-play installation

STANDARDS

- + IEEE 802.3 10BASE-T Ethernet (twisted-pair copper)
- + IEEE 802.3u 100BASE-TX Fast Ethernet (twisted-pair copper)
- + IEEE 802.3ab 1000BASE-T Gigabit Ethernet (twisted-pair copper)
- + ANSI/IEEE 802.3 NWay auto-negotiation
- + IEEE 802.3x Flow Control
- + IEEE 802.1p QoS

NUMBER OF PORTS

8 10BASE-T/100BASE-TX/1000BASE-T ports

PROTOCOL

CSMA/CD

DATA TRANSFER RATES

- + Ethernet:
 - 10Mbps (half duplex)
 - 20Mbps (full duplex)
- + Fast Ethernet:
 - 100Mbps (half duplex)
 - 200Mbps (full duplex)
- + Gigabit Ethernet:
 - 2000Mbps (full duplex)

TECHNICAL SPECIFICATIONS

TOPOLOGY

Star

NETWORK CABLES

- + 10BASE-T:
 - UTP Cat. 3, 4, 5 (100 m max.)
 - EIA/TIA-568 100-ohm STP (100 m max.)
- + 100BASE-TX, 1000BASE-T:
 - UTP Cat. 5, Cat. 5e (100 m max.)
 - EIA/TIA-568 100-ohm STP (100 m max.)

FULL/HALF DUPLEX

- + Full/half duplex for 10/100Mbps speeds
- + Full duplex for Gigabit speed

MEDIA INTERFACE EXCHANGE

Auto MDI/MDIX adjustment for all ports

LED INDICATORS

- + Per port: 100Mbps/1000Mbps speed, Link/Activity
- + Per device: Power

TRANSMISSION METHOD

Store-and-forward

MAC ADDRESS TABLE

8K entries per device

MAC ADDRESS LEARNING

Automatic update

PACKET FILTERING/FORWARDING RATES (HALF DUPLEX)

- + Ethernet: 14,880 pps per port
- + Fast Ethernet: 148,810 pps per port
- + Gigabit Ethernet: 1,488,100 pps per port

RAM BUFFER

144KBytes per device

DC INPUT

- + Linear DC 7.5V/1A or 7.5V/1.5A
- + Switching 5V/2A

POWER CONSUMPTION

6 watts

OPERATING TEMPERATURE

0° to 40° C (32° to 104° F)

STORAGE TEMPERATURE

-10° to 70° C (14° to 158° F)

OPERATING HUMIDITY

10% to 90% RH non-condensing

STORAGE HUMIDITY

5% to 90% RH non-condensing

DEVICE DIMENSIONS (W X D X H)

192 x 118 x 32 mm (7.5 x 4.5 x 1.2 inches)

EMISSION (EMI)

- + FCC Class B
- + ICES-003 Class B
- + CE Class B
- + C-Tick Class B
- + VCCI Class B

SAFETY

cUL

MTBF

1,611,344hours



D-Link Worldwide Offices

U.S.A	TEL: 1-800-326-1688	FAX: 1-866-743-4905	Spain	TEL: 34 93 409 0770	FAX: 34 93 491 0795	Iran	TEL: 90-212-289-5659	FAX: 90-212-289-7606
Canada	TEL: 1-905-8295033	FAX: 1-905-8295223	Portugal	TEL: 351 21 8688493	FAX: 351 21 8622492	Pakistan	TEL: 92-21-454-8158	FAX: 92-21-453-5103
Europe (U. K.)	TEL: 44-20-8955-9000	FAX: 44-20-8955-9001	Greece	TEL: 30 210 9914 512	FAX: 30 210 9916902	Israel	TEL: 972-9-9715700	FAX: 972-9-9715601
Germany	TEL: 49-6196-77990	FAX: 49-6196-7799300	Czech Republic	TEL: 420 224 247 500	FAX: 420 224 234 967	Latin America	TEL: 56-2-5838-950	FAX: 56-2-5838953
France	TEL: 33 1 30 23 86 88	FAX: 33 1 30 23 86 89	Hungary	TEL: 36 (01) 461 30 00	FAX: 36 (01) 461 30 04	Brazil	TEL: 55-11-2185-9300	FAX: 55-11-2185-9322
Netherlands	TEL: 31-10-282-1445	FAX: 31-10-282-1331	Poland	TEL: 48 (0)22 583 92 75	FAX: 48 (0)22 583 92 76	South Africa	TEL: 27-12-665-2165	FAX: 27-12-665-2186
Belgium & Luxembourg	TEL: 32 (0)2 517 7111	FAX: 32 (0)2 517 6500	Bulgaria	TEL: 359 2 958 22 42	FAX: 359 2 958 65 57	Russia	TEL: 7-495-744-0099	FAX: 7-495-744-0099
Switzerland	TEL: 41 (0)1 832 11 00	FAX: 41 (0)1 832 11 01	Romania	TEL: 40(0)21 320 23 05	FAX: 40(0)21 320 23 07	Japan	TEL: 81-3-5781-0963	FAX: 81-3-5781-0965
Austria	TEL: 43 (0)1 240 27 270	FAX: 43 (0)1 240 27 271	Singapore	TEL: 65-6774-6233	FAX: 65-6774-63225	Korea	TEL: 82-2-890-5491	FAX: 82-2-890-5490
Sweden	TEL: 46 (0)8 564 619 00	FAX: 46 (0)8 564 619 01	Australia	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868	China	TEL: 86-10-58635800	FAX: 86-10-58635799
Denmark	TEL: 45-43-969040	FAX: 45-43-424347	India	TEL: 91-22-2652 6696	FAX: 91-22-2652 8914	Taiwan	TEL: 886-2-6600-0123	FAX: 886-2-6600-3839
Norway	TEL: 47 99 300 100	FAX: 47 22 30 90 85	Middle East (Dubai)	TEL: 971-4-391-6480	FAX: 971-4-390-8881	Headquarters	TEL: 886-2-6600-0123	FAX: 886-2-6600-9898
Finland	TEL: 358-10 309 8840	FAX: 358-10 309 8841	Egypt	TEL: 202-291-9035	FAX: 202-291-9051			
Italy	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723	Turkey	TEL: 90-212-289-5659	FAX: 90-212-289-7606			